SYEDRA 140x70 cm

VitrA®

Size (cm)	: 140x70
Height (kg)	: 56
Weight (kg)	: 15
Front Panel Weight (kg)	: 3.5
Side Panel Weight (kg)	: 2
Volume (lt)	: 135
Available massage systems	: -

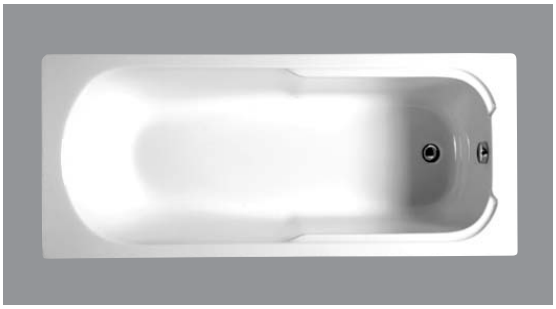

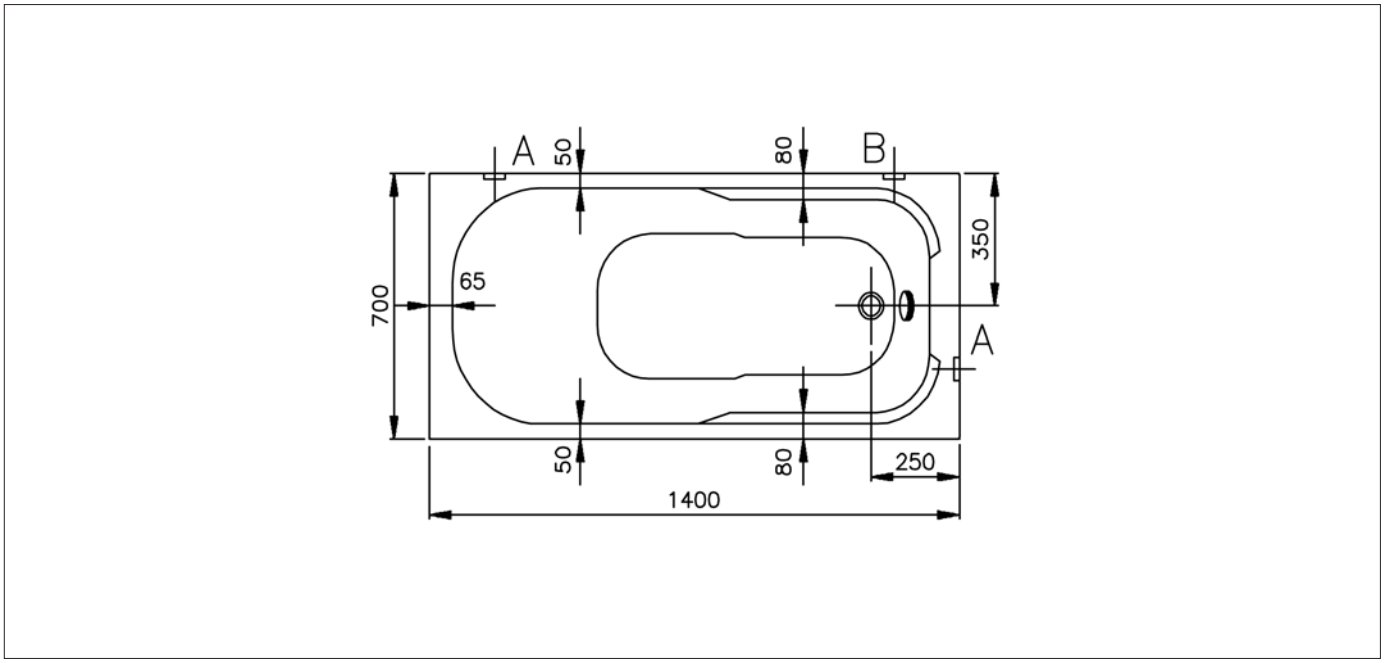

Plan

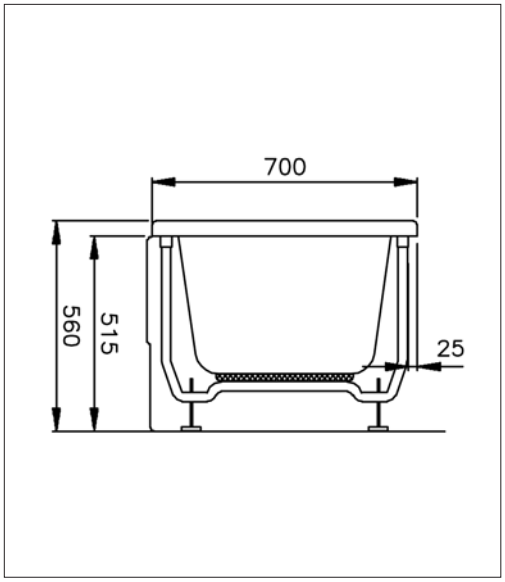

Side View

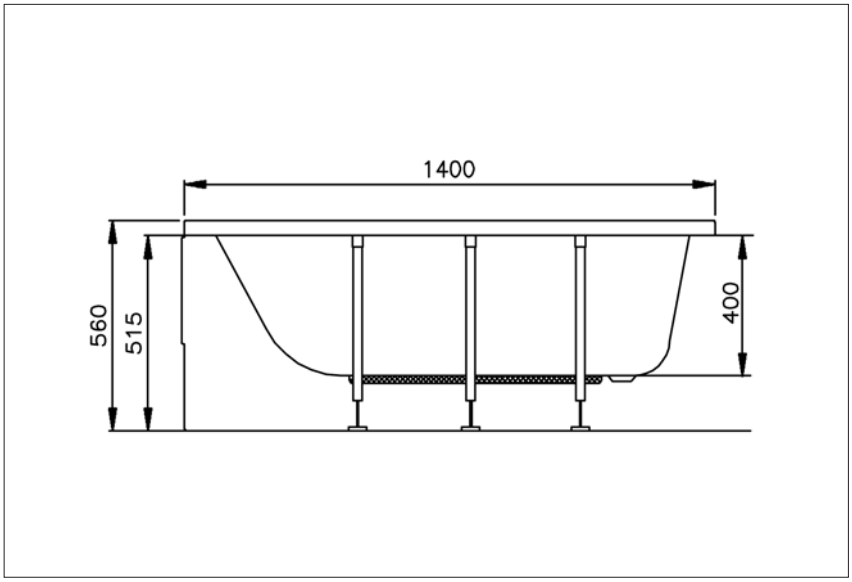

Front View

Detail A

Detail B

• As shown in Figure Plan, the wall hangers (details A-B) are used to fix the product to the wall. It is suggested to use the wall hangers to rigid the bathtub.

Points to Notice:

• No hidromassage application is carried to Syedra 140x70.
• The place where the product will be installed should be straight.
• During the installation of the panels, the adjustment of the leg set should be carried out according to the height of the panel.
• The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
• The spout should be min 15 cm. if the faucets are installed to the wall.
• Handgrip application for this product is not available.
• For the cleaning of the acrylic bathtub look at the User Manual.
• Waste connection fuse, wall hangers and user manual are delivered with the product.

Faucet Applications

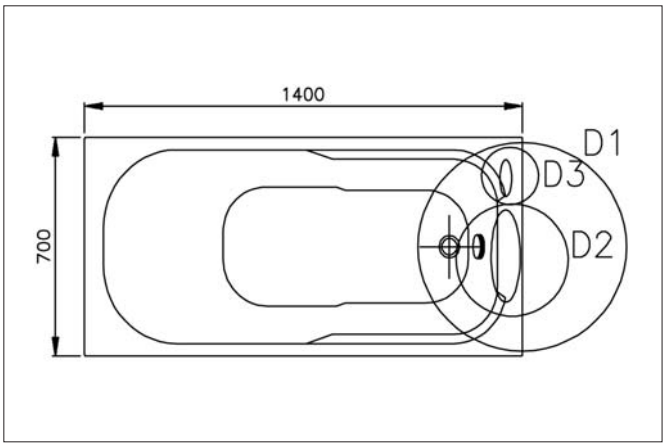

Faucet Application Places

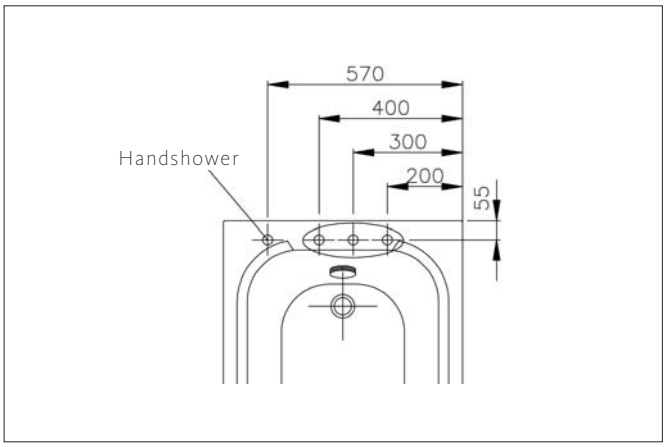

Bath Filler 4 Holes

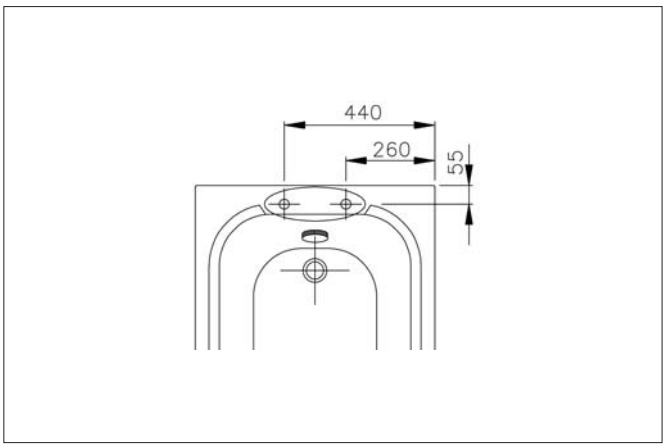

Bath Filler 2 Holes

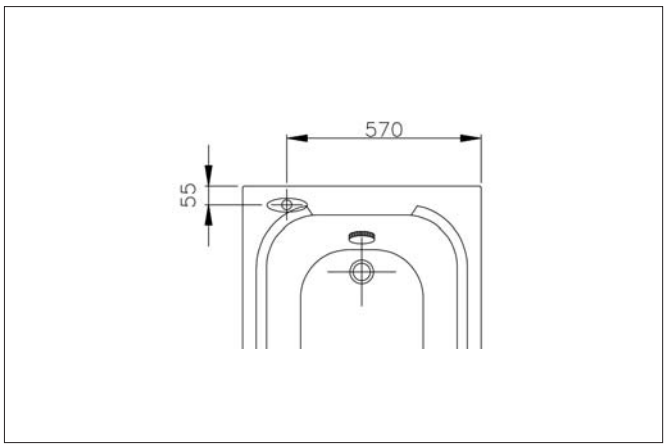

Bath Filler one Hole

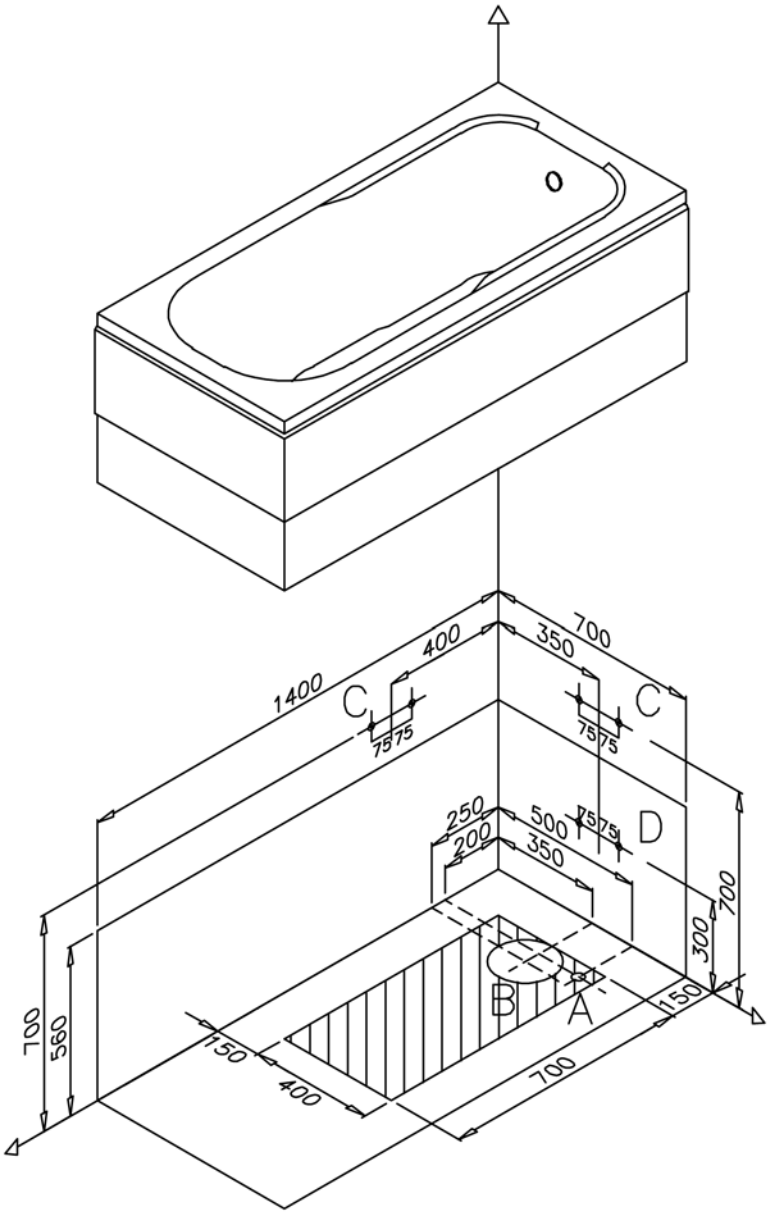

▨ : The area where the waste outlet (ø 50 mm) can be placed in.

A : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.

B : The area (ø 200 mm.) where the waste outlet should not be left.

C : Hot & cold water inlet for the wall taps.

D : Hot & cold water inlet for the taps on the bathtub.

There is no need to leave additional space for the silicone during the installation process. It is enough to prepare the required area according to the size of the product.

Perspective

VitrA Bathtubs Co.
always keeps the rights to make
any changes on the product.
(October 2008)

VitrA Bathtubs Co.
Cumhuriyet Mah. 13. Sok. No: 10 Şekerpınar 41400 Gebze / Kocaeli / Turkey
Tel: +90 (262) 648 95 00 (pbx) Fax: +90 (262) 658 85 94
E-mail: vitrabathtubs.export@eczacibasi.com.tr
www.vitrakuvet.com.tr

Eczacıbaşı

SYEDRA 150x70 cm

VitrA®

Size (cm)	: 150x70
Height (kg)	: 56
Weight (kg)	: 17
Front Panel Weight (kg)	: 4
Side Panel Weight (kg)	: 2
Volume (lt)	: 145
Available massage systems	: Aqua Soft Aqua Soft Easy

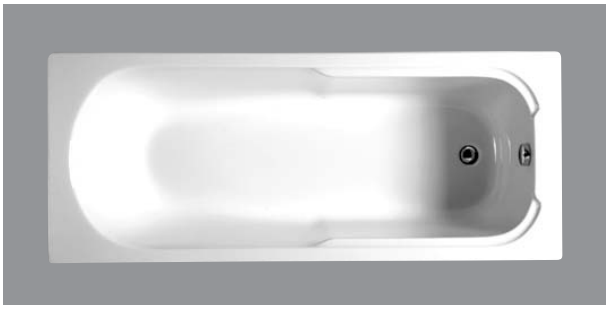

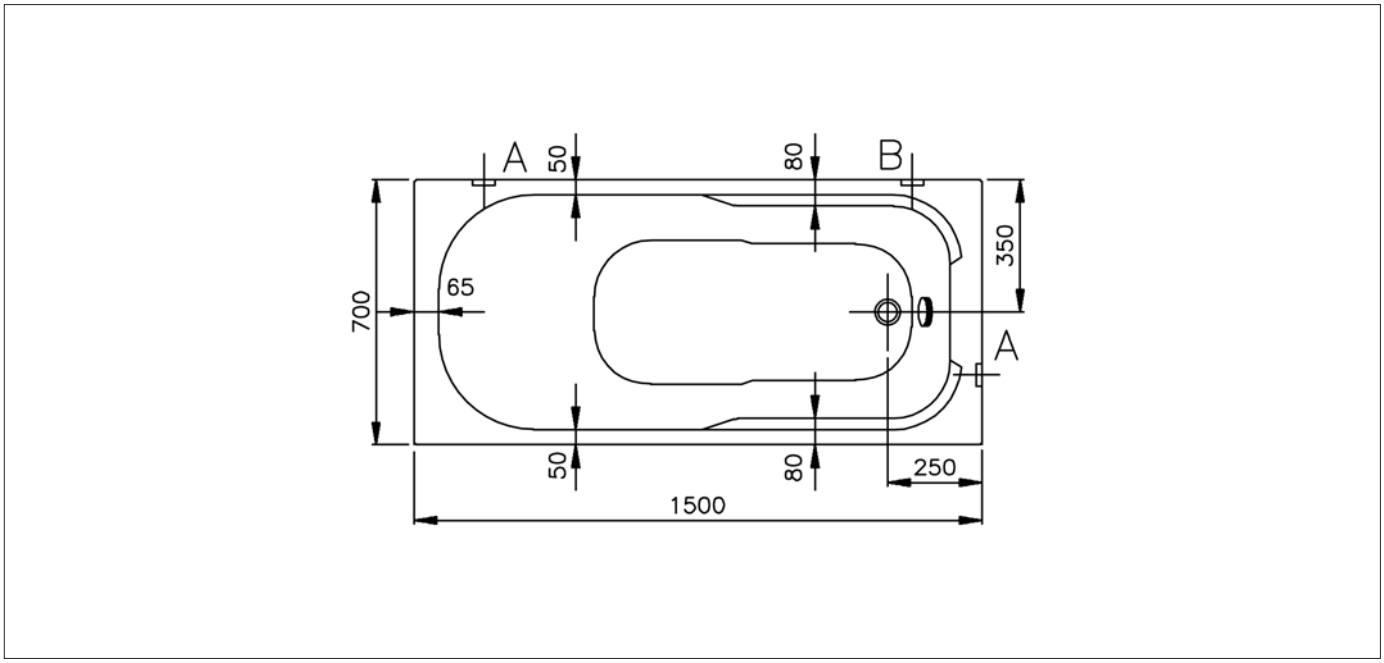

Plan

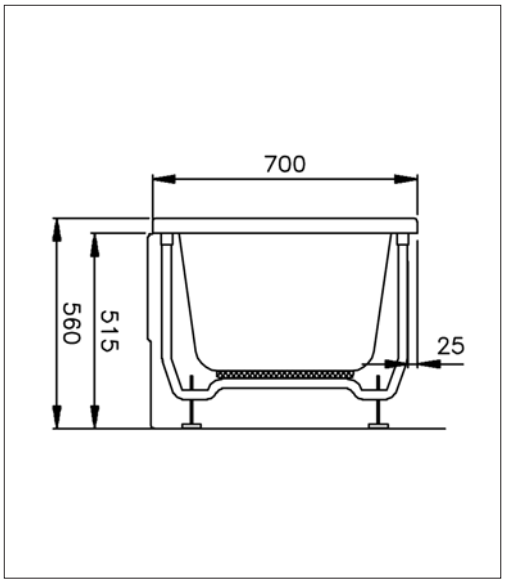

Side View

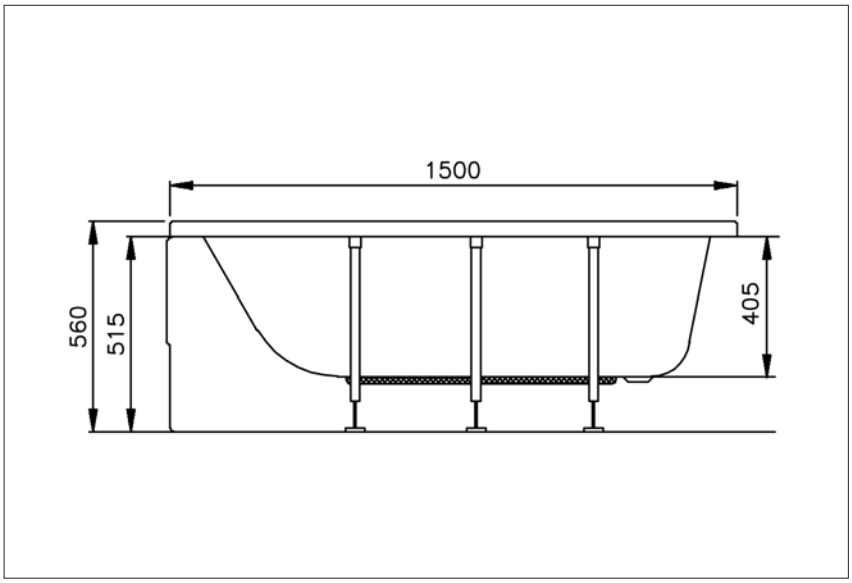

Front View

Detail A

Detail B

• As shown in Figure Plan, the wall hangers (details A-B) are used to fix the product to the wall. It is suggested to use the wall hangers to rigid the bathtub.

Points to Notice:

- An elbow and a waste connection hose of 50 mm. will be delivered with the product but an edge lath and other accessories are not included.
- The place where the product will be installed should be straight.
- An airing and access window should be left if the hydromassage bathtub is installed without panels.
- During the installation of the panels, the adjustment of the leg set should be carried out according to the height of the panel.
- The electronical system is running with 220 volt (with earth connection). For its connection a 3x2,5 mm. cable should be used.
- The product should be protected with an appropriate ampere fuse (for Duo Maxi System 20 ampere, for Duo Soft System 16 ampere, for Aqua Maxi and Aqua Soft Systems 10 ampere) and the amper fuse should be closed when it is not used.
- The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
- The faucet should not be applied on the pump of the hydromassage bathtub.
- The spout should be min 15 cm. if the faucets are installed to the wall.
- Handgrip application for this product is not available.
- For the cleaning of the acrylic bathtub look at the User Manual.
- Waste connection fuse, wall hangers and user manual are delivered with the product.

Faucet Applications

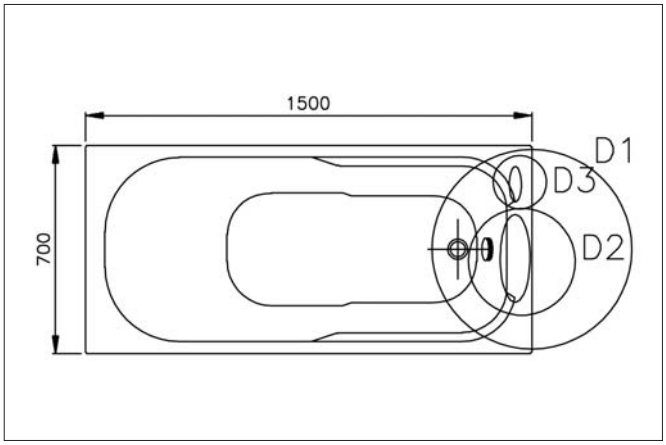

Faucet Application Places

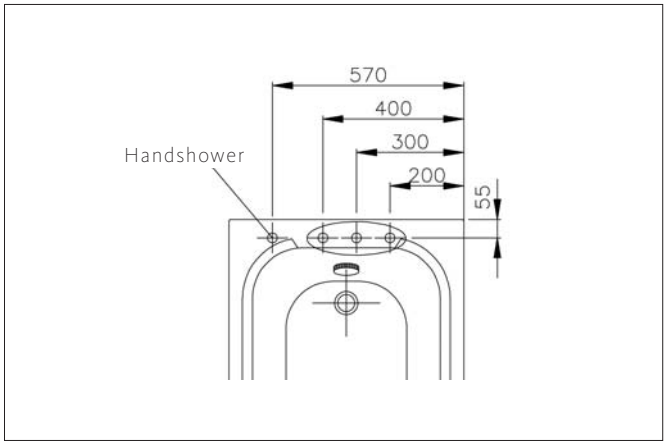

Bath Filler 4 Holes

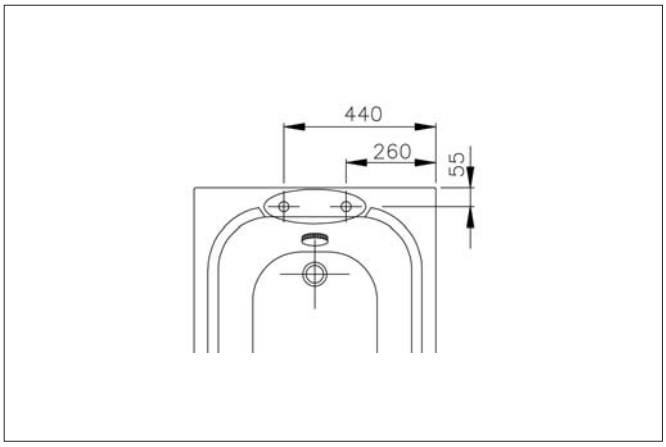

Bath Filler 2 Holes

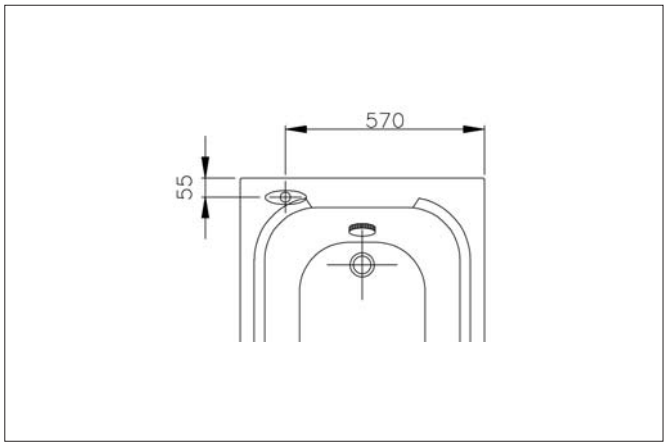

Bath Filler one Hole

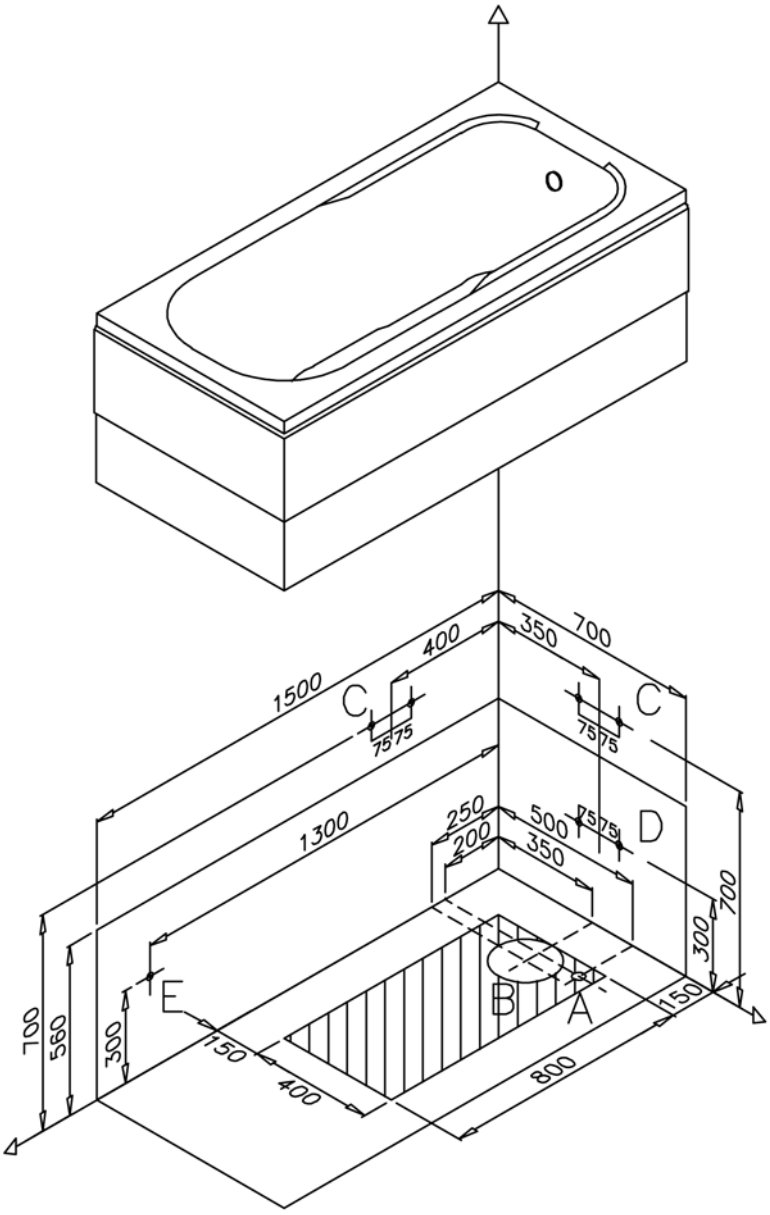

: The area where the waste outlet (ø 50 mm) can be placed in.

A : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.

B : The area (ø 200 mm.) where the waste outlet should not be left.

C : Hot & cold water inlet for the wall taps.

D : Hot & cold water inlet for the taps on the bathtub.

E : Measures for electrical connection of whirlpool tubs.

There is no need to leave additional space for the silicone during the installation process. It is enough to prepare the required area according to the size of the product.

Perspective

Massage Systems

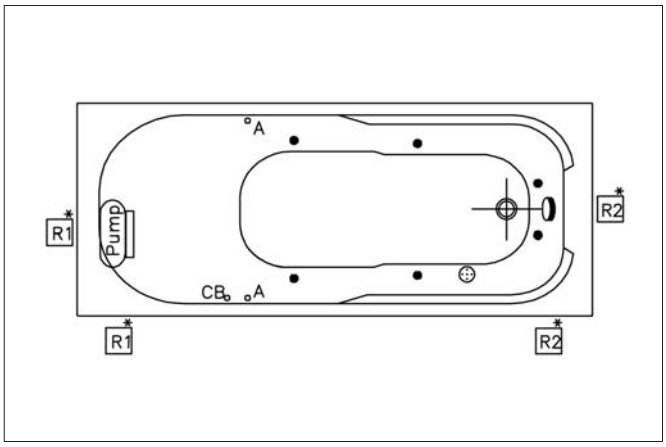

Aqua Soft

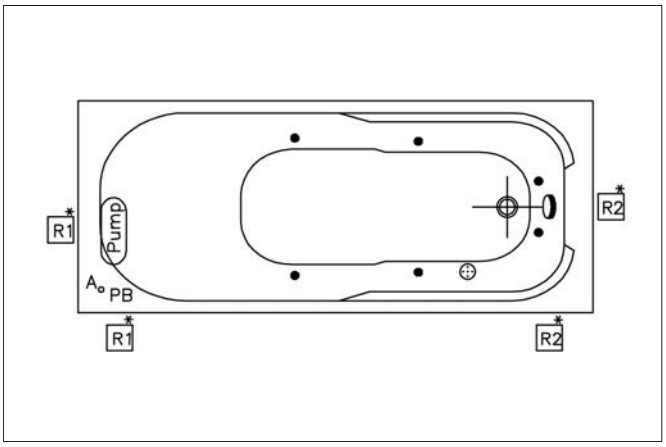

Aqua Soft Easy

Pump	Pump
	Electronic Control Panel
A°	Air Controller
°CB	Control Button

	Waste
	Water Jets
	Water Suction Filter
PB	Push Button

IMPORTANT!

- For the electrical connection of the hydromassage bathtubs, earth connection is necessary.
- The cable connection of the hyrdomassage bathtubs should be applied as shown in the Figure.
- Check whether the yellow-green earth cables bound with the metal parts placed under the hydromassage bathtubs are connected to all legs.



If the bathtub is used without panels, the following airing and access windows should be applied:

R1 Access window (min. 400x400 mm.)

R1* Airing and access window (min. 400x400 mm.)

R2 Access window (min. 400x400 mm.)

R2* Airing and access window (min. 250x250 mm.)

VitrA Bathtubs Co.
always keeps the rights to make any changes on the product.
(October 2008)

VitrA Bathtubs Co.
Cumhuriyet Mah. 13. Sok. No: 10 Şekerpınar 41400 Gebze / Kocaeli / Turkey
Tel: +90 (262) 648 95 00 (pbx) Fax: +90 (262) 658 85 94
E-mail: vitrabathtubs.export@eczacibasi.com.tr
www.vitrakuvet.com.tr

Eczacıbaşı

SYEDRA 160x70 cm

VitrA®

Size (cm)	: 160x70
Height (kg)	: 56
Weight (kg)	: 19
Front Panel Weight (kg)	: 4.5
Side Panel Weight (kg)	: 2
Volume (lt)	: 160
Available massage systems	: Aqua Soft Aqua Soft Easy

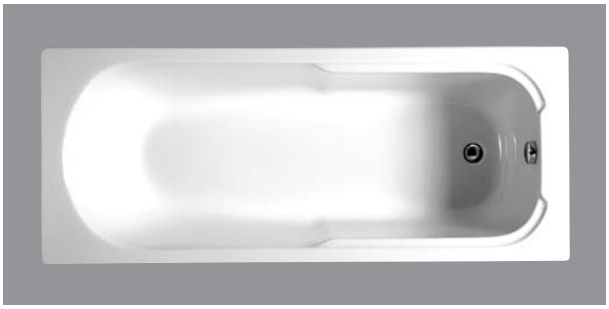

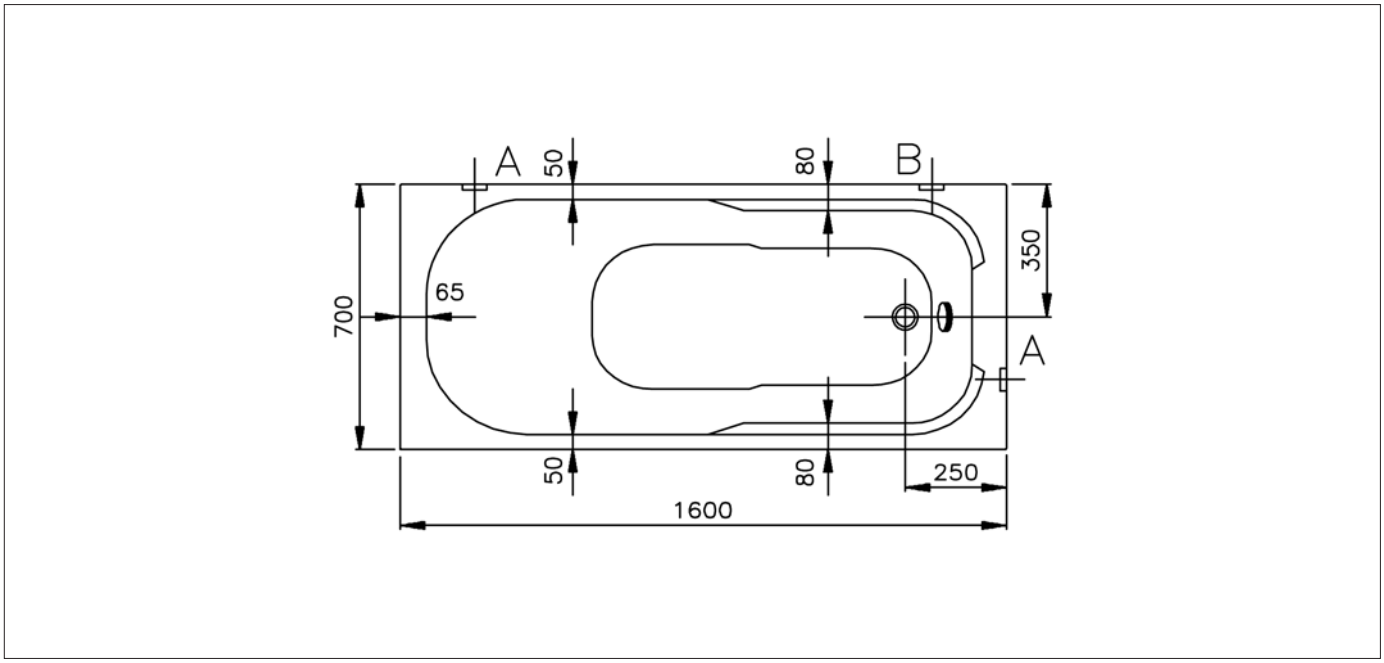

Plan

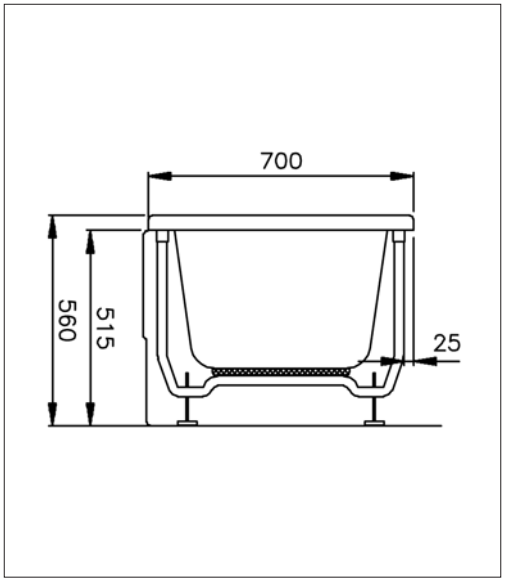

Side View

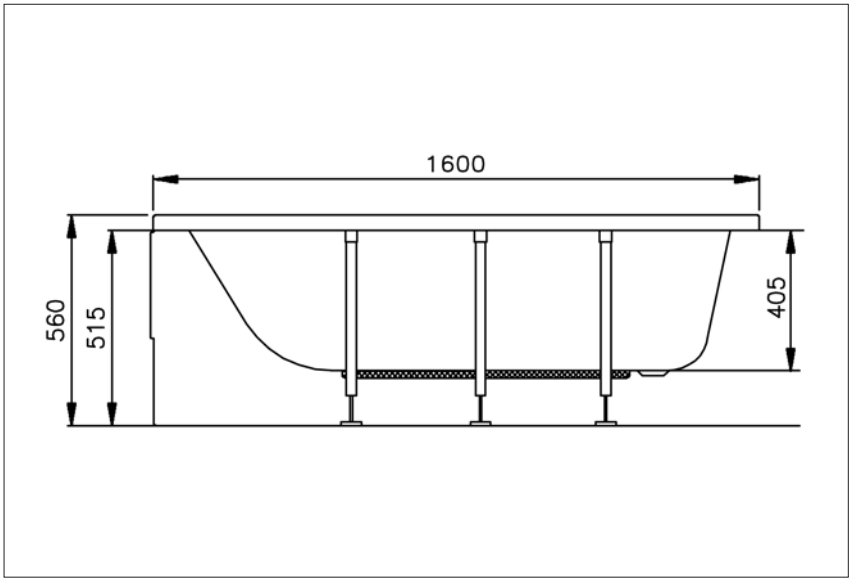

Front View

Detail A

Detail B

• As shown in Figure Plan, the wall hangers (details A-B) are used to fix the product to the wall. It is suggested to use the wall hangers to rigid the bathtub.

Points to Notice:

- An elbow and a waste connection hose of 50 mm. will be delivered with the product but an edge lath and other accessories are not included.
- The place where the product will be installed should be straight.
- An airing and access window should be left if the hydromassage bathtub is installed without panels.
- During the installation of the panels, the adjustment of the leg set should be carried out according to the height of the panel.
- The electronical system is running with 220 volt (with earth connection). For its connection a 3x2,5 mm. cable should be used.
- The product should be protected with an appropriate ampere fuse (for Duo Maxi System 20 ampere, for Duo Soft System 16 ampere, for Aqua Maxi and Aqua Soft Systems 10 ampere) and the amper fuse should be closed when it is not used.
- The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
- The faucet should not be applied on the pump of the hydromassage bathtub.
- The spout should be min 15 cm. if the faucets are installed to the wall.
- Handgrip application for this product is not available.
- For the cleaning of the acrylic bathtub look at the User Manual.
- Waste connection fuse, wall hangers and user manual are delivered with the product.

Faucet Applications

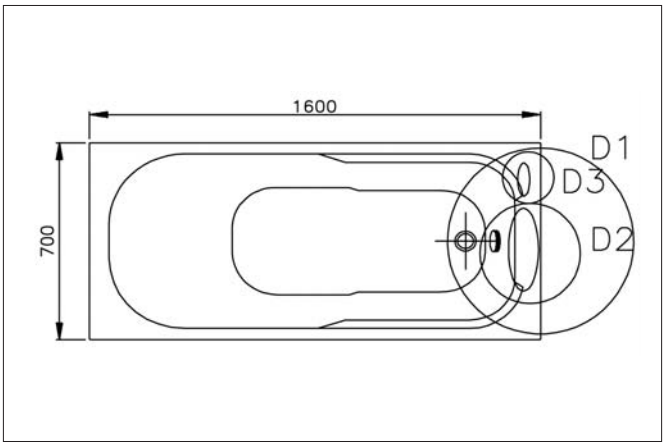

Faucet Application Places

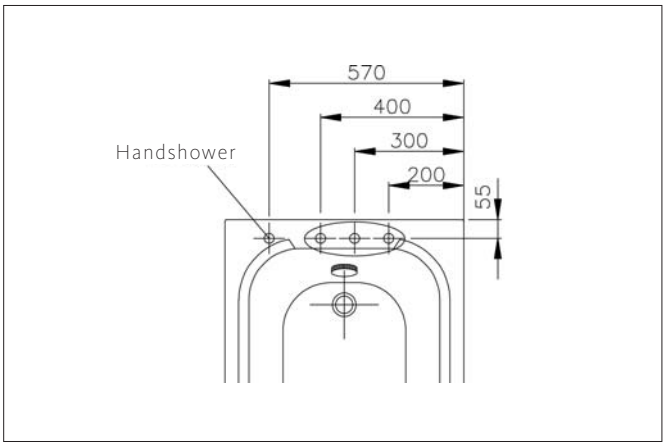

Bath Filler 4 Holes

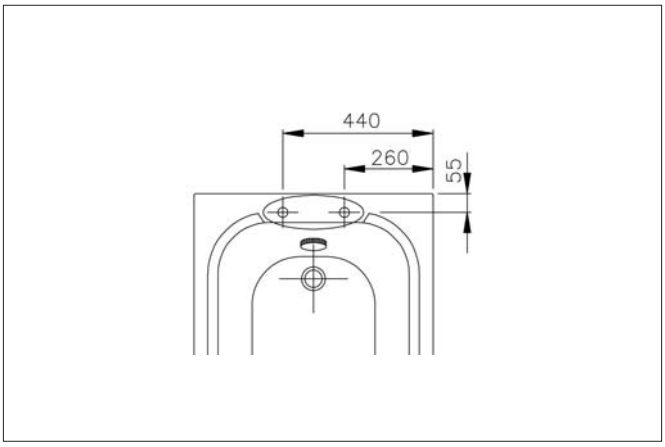

Bath Filler 2 Holes

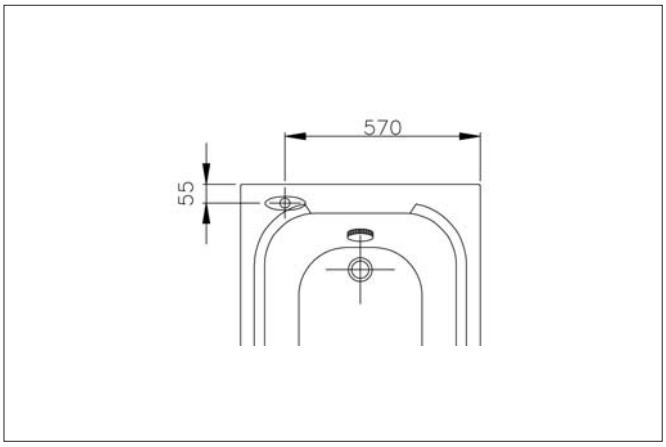

Bath Filler one Hole

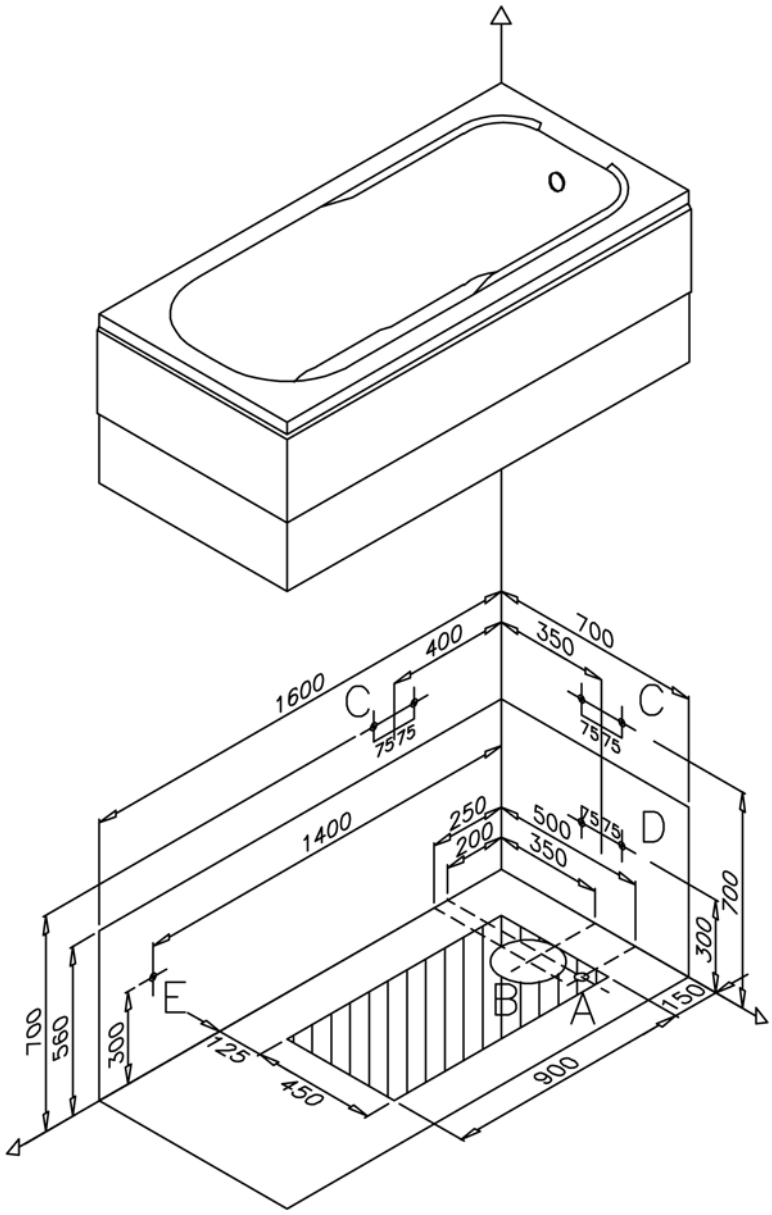

: The area where the waste outlet (ø 50 mm) can be placed in.

A : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.

B : The area (ø 200 mm.) where the waste outlet should not be left.

C : Hot & cold water inlet for the wall taps.

D : Hot & cold water inlet for the taps on the bathtub.

E : Measures for electrical connection of whirlpool tubs.

There is no need to leave additional space for the silicone during the installation process. It is enough to prepare the required area according to the size of the product.

Perspective

Massage Systems

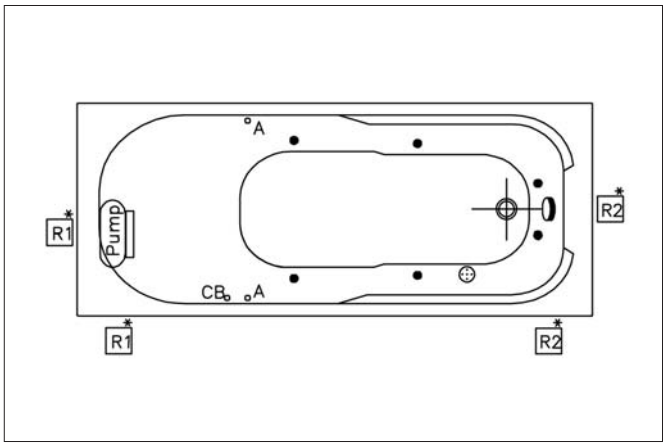

Aqua Soft

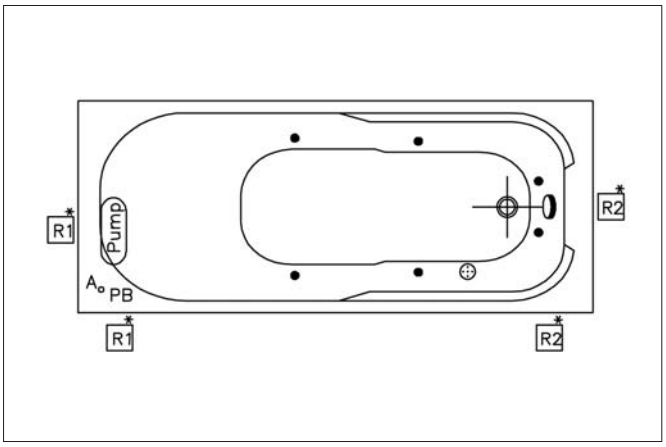

Aqua Soft Easy

Pump	Pompa
	Elektronik Kontrol Kutusu
A°	Hava Kontrolörü
°CB	Kontrol Paneli

	Sifon Yeri
	Su Jeti
	Su Emiş Filtresi
PB	Açma / Kapama Butonu

IMPORTANT!

- For the electrical connection of the hydromassage bathtubs, earth connection is necessary.
- The cable connection of the hyrdomassage bathtubs should be applied as shown in the Figure.
- Check whether the yellow-green earth cables bound with the metal parts placed under the hydromassage bathtubs are connected to all legs.



If the bathtub is used without panels, the following airing and access windows should be applied:

R1 Access window (min. 400x400 mm.)

R1* Airing and access window (min. 400x400 mm.)

R2 Access window (min. 400x400 mm.)

R2* Airing and access window (min. 250x250 mm.)

VitrA Bathtubs Co.
always keeps the rights to make any changes on the product.
(October 2008)

VitrA Bathtubs Co.
Cumhuriyet Mah. 13. Sok. No: 10 Şekerpınar 41400 Gebze / Kocaeli / Turkey
Tel: +90 (262) 648 95 00 (pbx) Fax: +90 (262) 658 85 94
E-mail: vitrabathtubs.export@eczacibasi.com.tr
www.vitrakuvet.com.tr

Eczacıbaşı

SYEDRA 170x70 cm

VitrA®

Size (cm)	: 170x70
Height (kg)	: 56
Weight (kg)	: 21
Front Panel Weight (kg)	: 5
Side Panel Weight (kg)	: 2
Volume (lt)	: 190
Available massage systems	: Aqua Soft Aqua Soft Easy

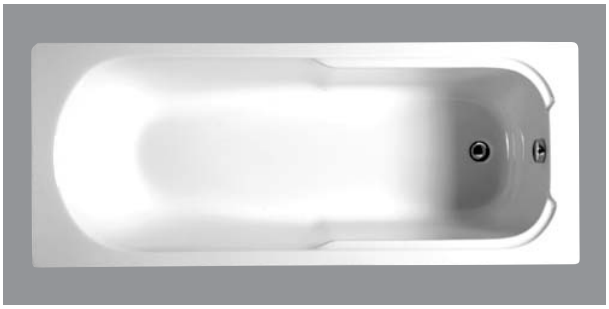

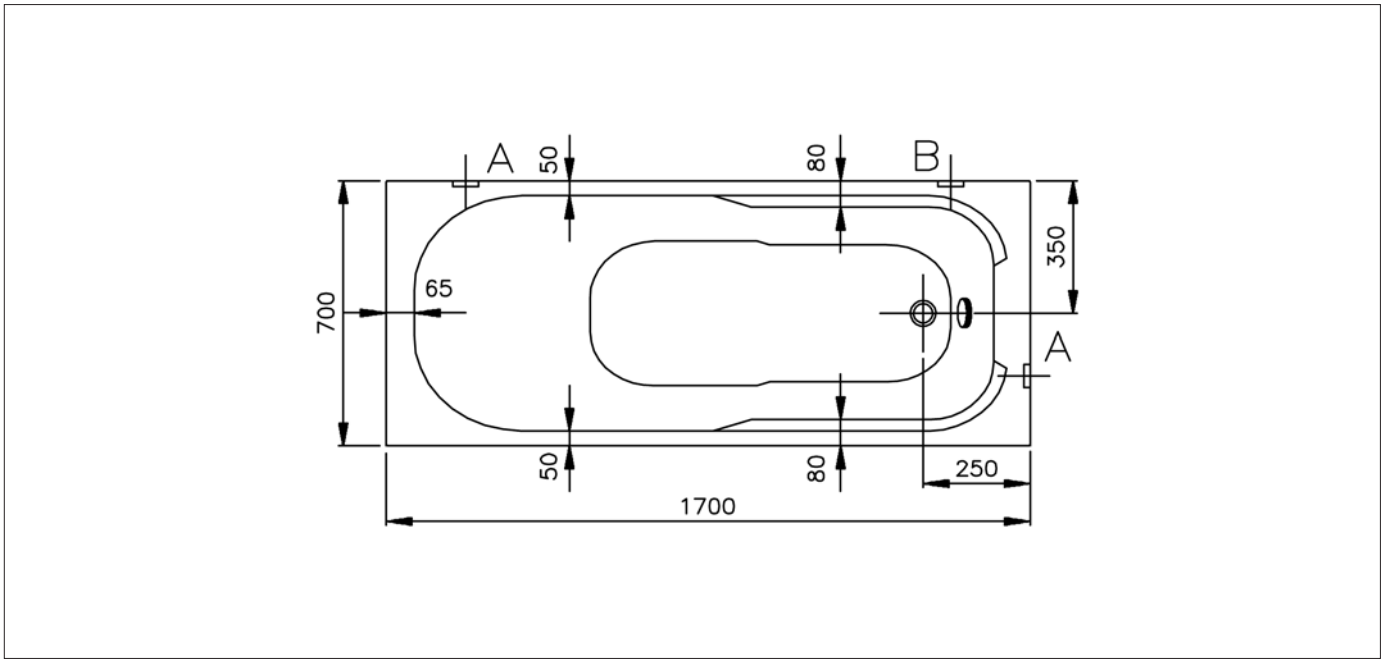

Plan

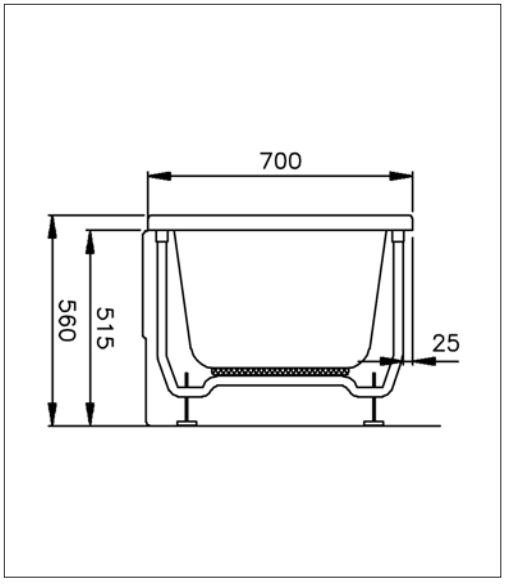

Side View

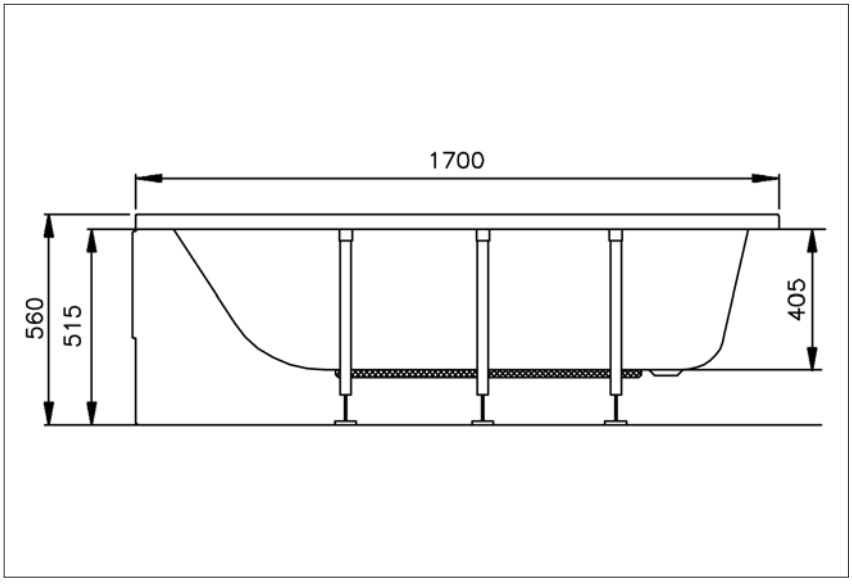

Front View

Detail A

Detail B

• As shown in Figure Plan, the wall hangers (details A-B) are used to fix the product to the wall. It is suggested to use the wall hangers to rigid the bathtub.

Points to Notice:

- An elbow and a waste connection hose of 50 mm. will be delivered with the product but an edge lath and other accessories are not included.
- The place where the product will be installed should be straight.
- An airing and access window should be left if the hydromassage bathtub is installed without panels.
- During the installation of the panels, the adjustment of the leg set should be carried out according to the height of the panel.
- The electronical system is running with 220 volt (with earth connection). For its connection a 3x2,5 mm. cable should be used.
- The product should be protected with an appropriate ampere fuse (for Duo Maxi System 20 ampere, for Duo Soft System 16 ampere, for Aqua Maxi and Aqua Soft Systems 10 ampere) and the amper fuse should be closed when it is not used.
- The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
- The faucet should not be applied on the pump of the hydromassage bathtub.
- The spout should be min 15 cm. if the faucets are installed to the wall.
- Handgrip application for this product is not available.
- For the cleaning of the acrylic bathtub look at the User Manual.
- Waste connection fuse, wall hangers and user manual are delivered with the product.

Faucet Applications

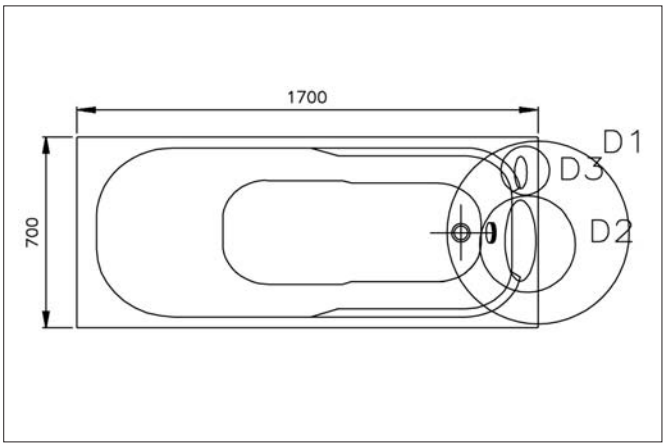

Faucet Application Places

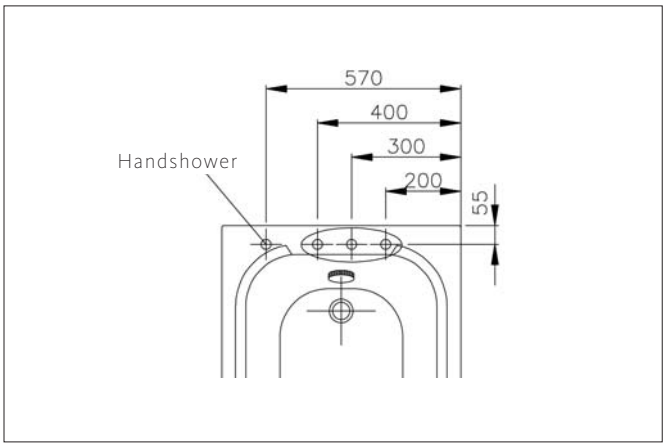

Bath Filler 4 Holes

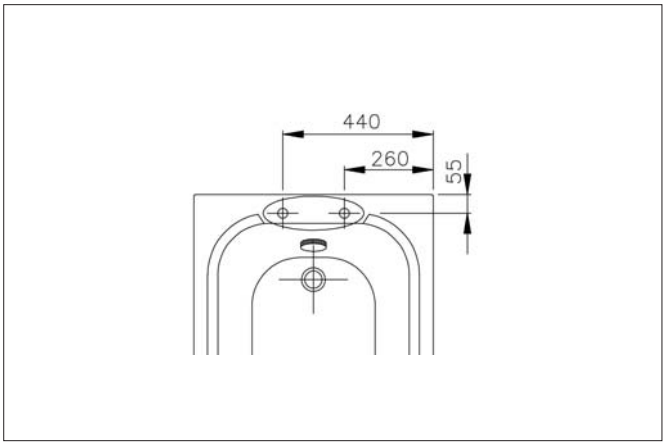

Bath Filler 2 Holes

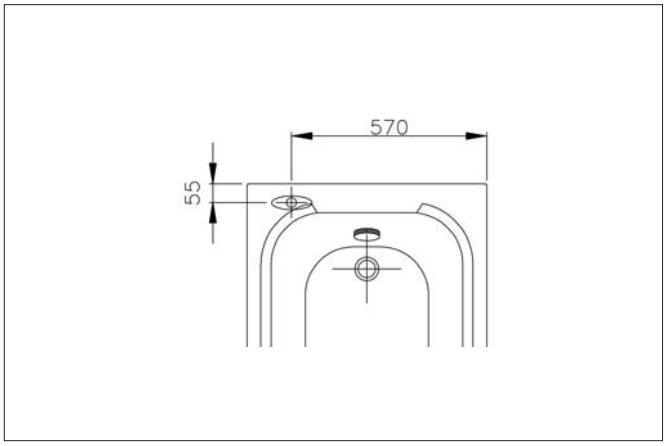

Bath Filler one Hole

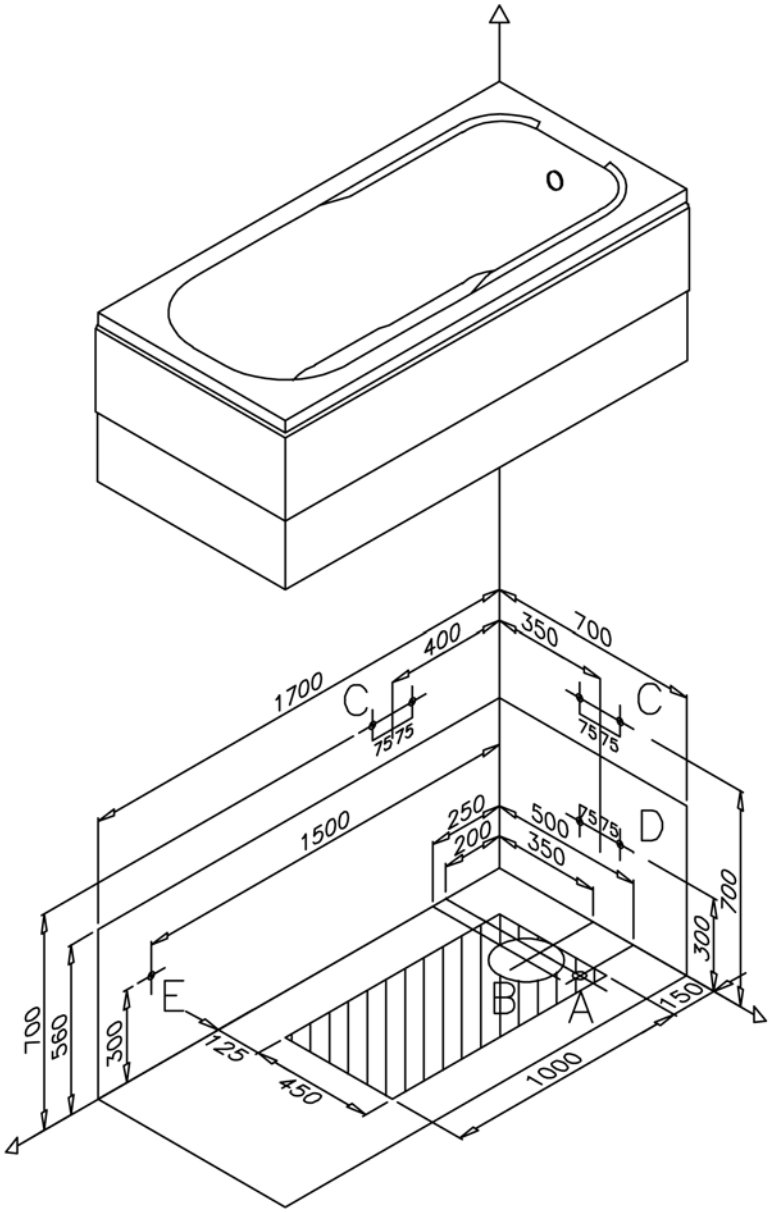

▨ : The area where the waste outlet (ø 50 mm) can be placed in.

A : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.

B : The area (ø 200 mm.) where the waste outlet should not be left.

C : Hot & cold water inlet for the wall taps.

D : Hot & cold water inlet for the taps on the bathtub.

E : Measures for electrical connection of whirlpool tubs.

There is no need to leave additional space for the silicone during the installation process. It is enough to prepare the required area according to the size of the product.

Perspective

Massage Systems

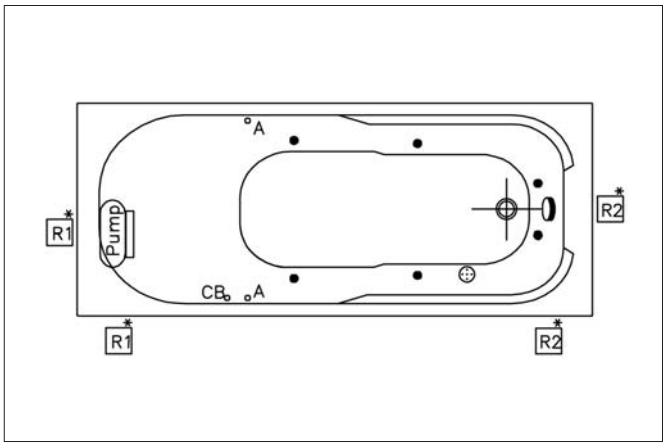

Aqua Soft

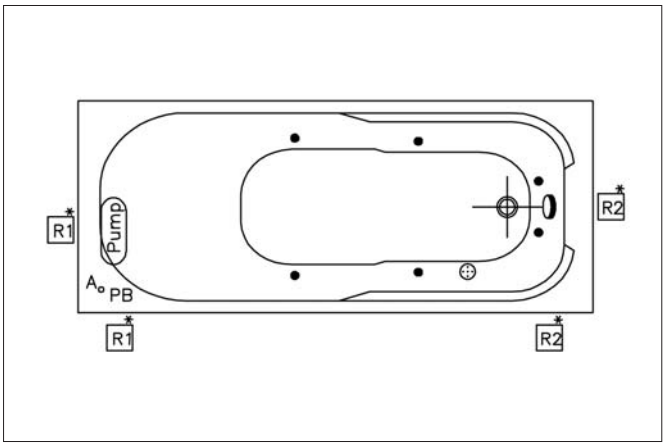

Aqua Soft Easy

Pump	Pompa		Sifon Yeri
	Elektronik Kontrol Kutusu	●	Su Jeti
A°	Hava Kontrolörü		Su Emiş Filtresi
°CB	Kontrol Paneli	PB	Açma / Kapama Butonu

IMPORTANT!

- For the electrical connection of the hydromassage bathtubs, earth connection is necessary.
- The cable connection of the hyrdomassage bathtubs should be applied as shown in the Figure.
- Check whether the yellow-green earth cables bound with the metal parts placed under the hydromassage bathtubs are connected to all legs.



If the bathtub is used without panels, the following airing and access windows should be applied:

R1 Access window (min. 400x400 mm.)

R1* Airing and access window (min. 400x400 mm.)

R2 Access window (min. 400x400 mm.)

R2* Airing and access window (min. 250x250 mm.)

VitrA Bathtubs Co.
Cumhuriyet Mah. 13. Sok. No: 10 Şekerpınar 41400 Gebze / Kocaeli / Turkey
Tel: +90 (262) 648 95 00 (pbx) Fax: +90 (262) 658 85 94
E-mail: vitrabathtubs.export@eczacibasi.com.tr
www.vitrakuvet.com.tr

*VitrA Bathtubs Co.
always keeps the rights to make
any changes on the product.
(October 2008)*

Eczacıbaşı

SYEDRA 170x75 cm

VitrA®

Size (cm)	: 170x75
Height (kg)	: 56
Weight (kg)	: 22.5
Front Panel Weight (kg)	: 5
Side Panel Weight (kg)	: 2.5
Volume (lt)	: 205
Available massage systems	: Aqua Soft Aqua Soft Easy

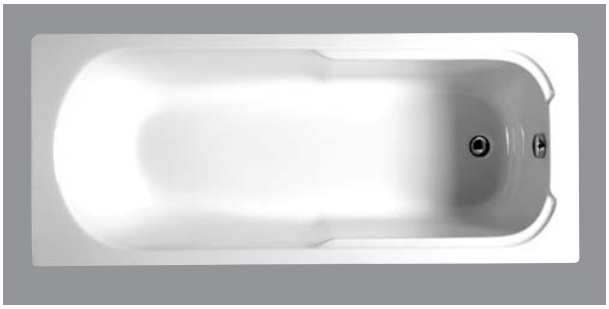

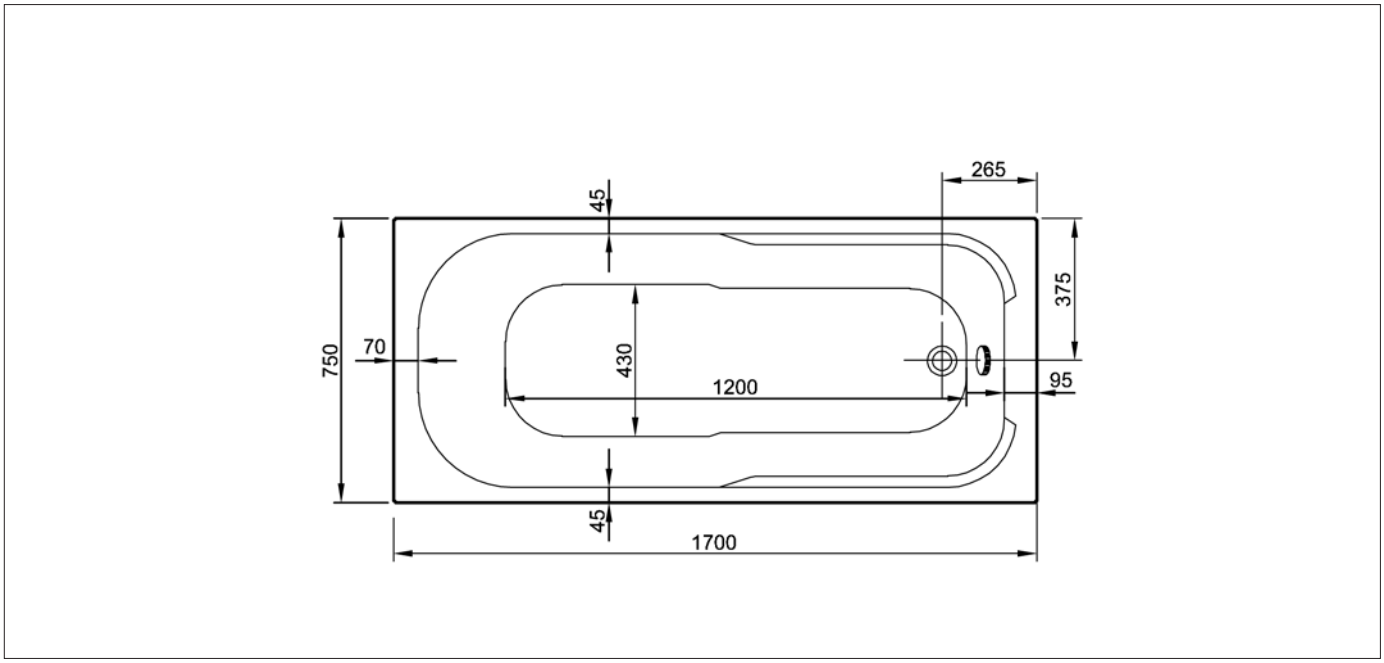

Plan

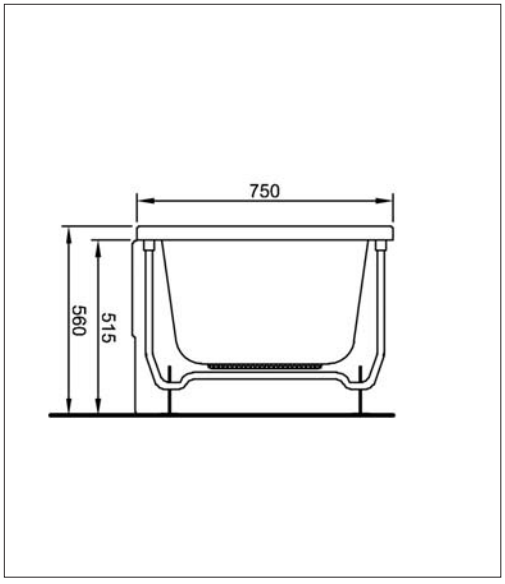

Side View

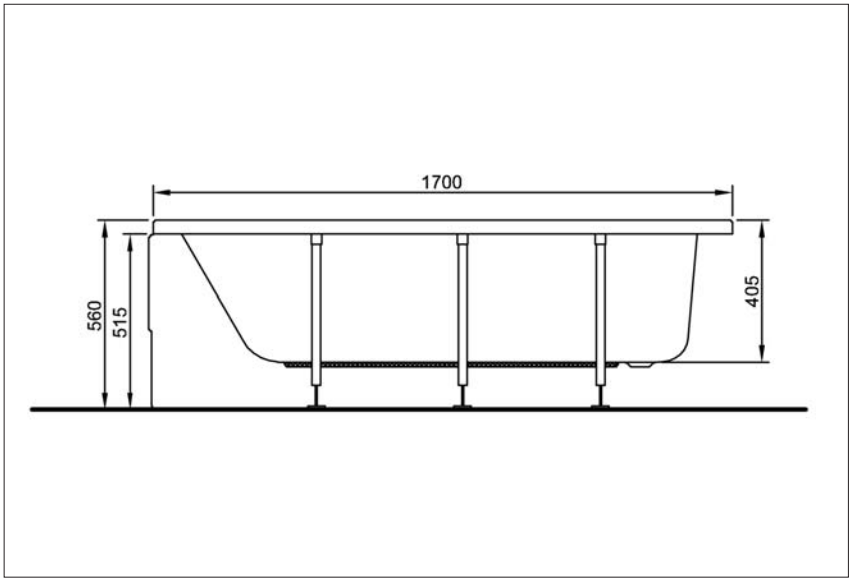

Front View

Detail A

Detail B

• As shown in Figure Plan, the wall hangers (details A-B) are used to fix the product to the wall. It is suggested to use the wall hangers to rigid the bathtub.

Points to Notice:

- An elbow and a waste connection hose of 50 mm. will be delivered with the product but an edge lath and other accessories are not included.
- The place where the product will be installed should be straight.
- An airing and access window should be left if the hydromassage bathtub is installed without panels.
- During the installation of the panels, the adjustment of the leg set should be carried out according to the height of the panel.
- The electronical system is running with 220 volt (with earth connection). For its connection a 3x2,5 mm. cable should be used.
- The product should be protected with an appropriate ampere fuse (for Duo Maxi System 20 ampere, for Duo Soft System 16 ampere, for Aqua Maxi and Aqua Soft Systems 10 ampere) and the amper fuse should be closed when it is not used.
- The faucet applications should be from the points shown in the drawings below which are indicated with stickers on the product.
- The faucet should not be applied on the pump of the hydromassage bathtub.
- The spout should be min 15 cm. if the faucets are installed to the wall.
- Handgrip application for this product is not available.
- For the cleaning of the acrylic bathtub look at the User Manual.
- Waste connection fuse, wall hangers and user manual are delivered with the product.

Faucet Applications

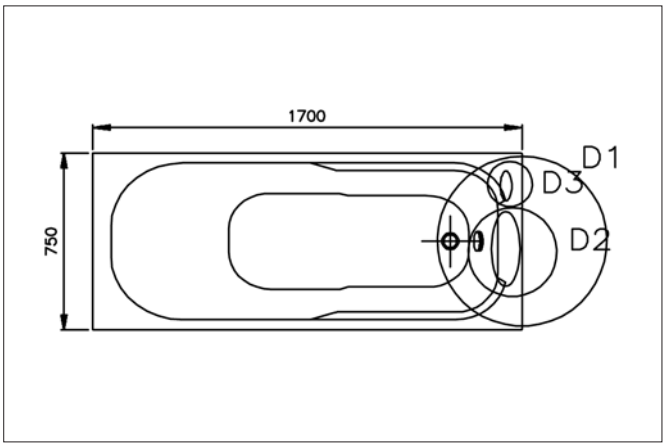

Faucet Application Places

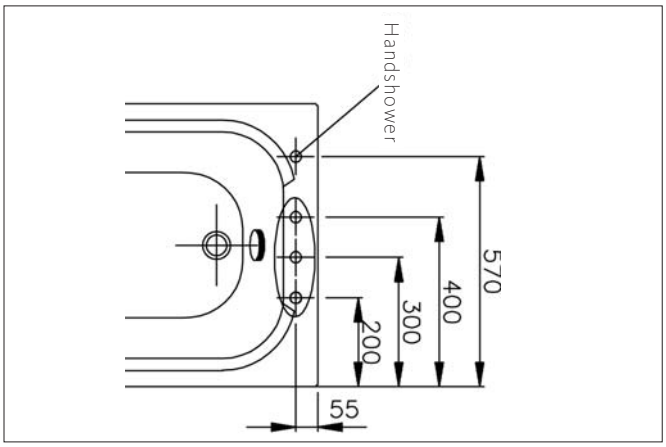

Bath Filler 4 Holes

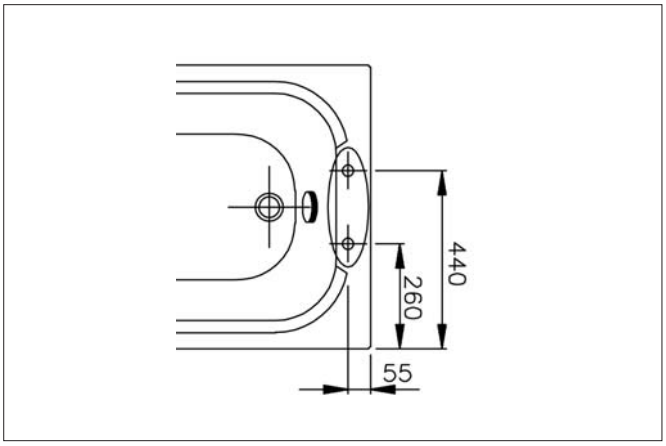

Bath Filler 2 Holes

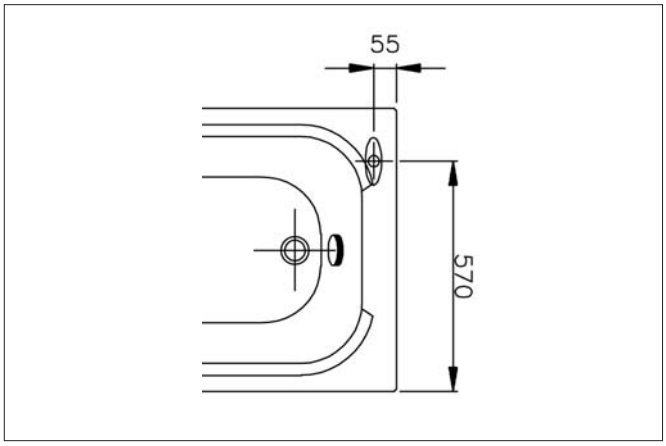

Bath Filler one Hole

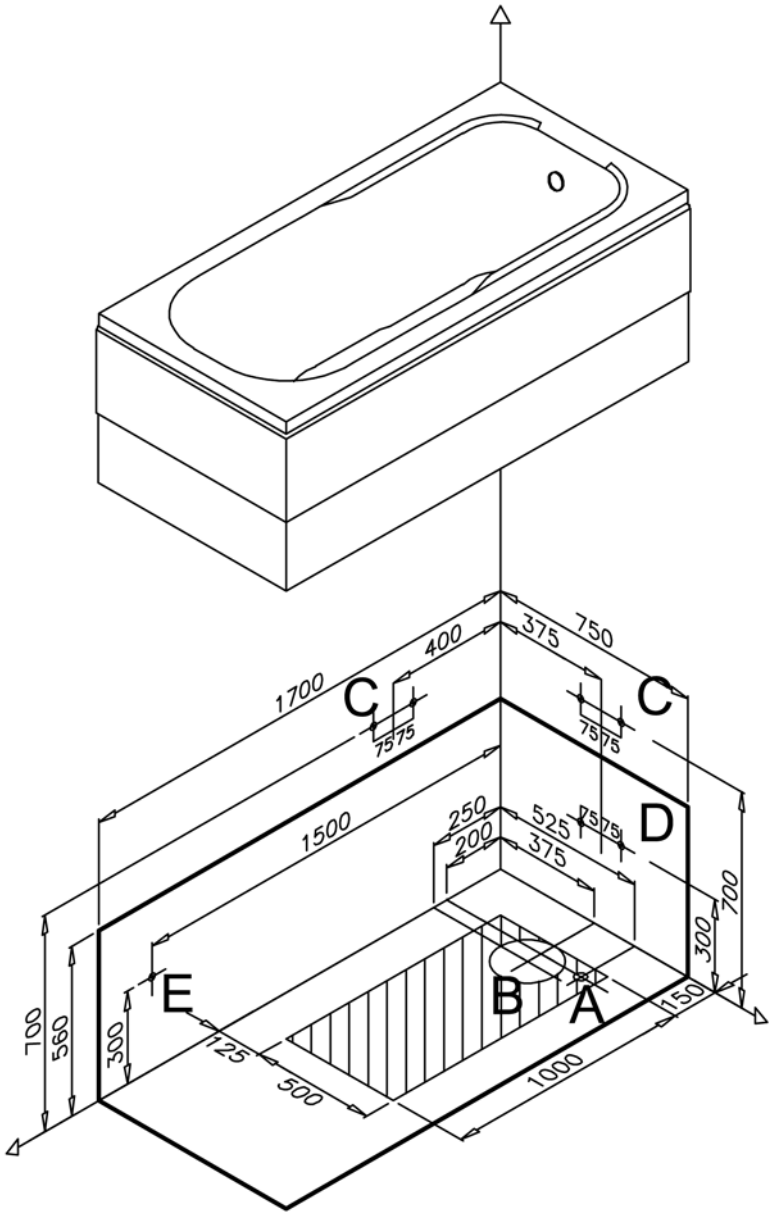

: The area where the waste outlet (ø 50 mm) can be placed in.

A : Ideal position of the waste outlet (ø 50 mm). The end point of the waste outlet should not be cut out, and should be left at least 50 mm. above the surface.

B : The area (ø 200 mm.) where the waste outlet should not be left.

C : Hot & cold water inlet for the wall taps.

D : Hot & cold water inlet for the taps on the bathtub.

E : Measures for electrical connection of whirlpool tubs.

There is no need to leave additional space for the silicone during the installation process. It is enough to prepare the required area according to the size of the product.

Perspective

Massage Systems

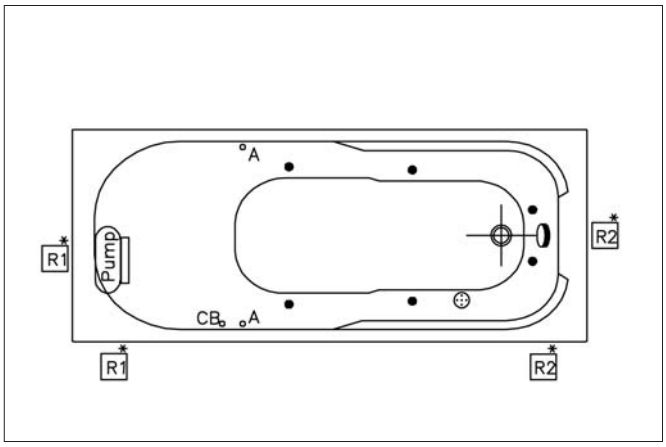

Aqua Soft

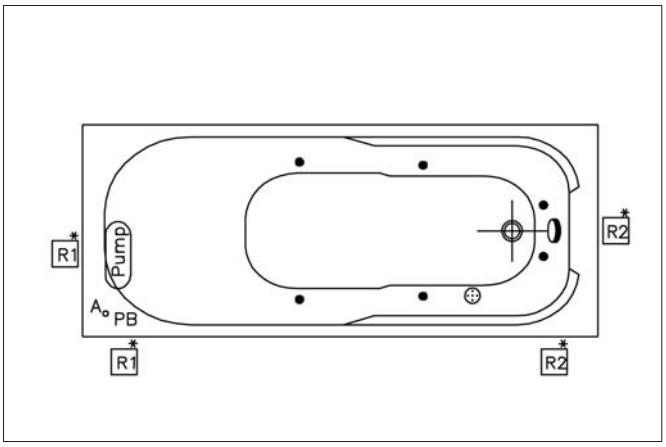

Aqua Soft Easy

Pump	Pompa		Sifon Yeri
	Elektronik Kontrol Kutusu	●	Su Jeti
A°	Hava Kontrolörü		Su Emiş Filtresi
°CB	Kontrol Paneli	PB	Açma / Kapama Butonu

IMPORTANT!

- For the electrical connection of the hydromassage bathtubs, earth connection is necessary.
- The cable connection of the hyrdomassage bathtubs should be applied as shown in the Figure.
- Check whether the yellow-green earth cables bound with the metal parts placed under the hydromassage bathtubs are connected to all legs.



If the bathtub is used without panels, the following airing and access windows should be applied:

R1 Access window (min. 400x400 mm.)

R1* Airing and access window (min. 400x400 mm.)

R2 Access window (min. 400x400 mm.)

R2* Airing and access window (min. 250x250 mm.)

VitrA Bathtubs Co.
always keeps the rights to make
any changes on the product.
(October 2008)

VitrA Bathtubs Co.
Cumhuriyet Mah. 13. Sok. No: 10 Şekerpınar 41400 Gebze / Kocaeli / Turkey
Tel: +90 (262) 648 95 00 (pbx) Fax: +90 (262) 658 85 94
E-mail: vitrabathtubs.export@eczacibasi.com.tr
www.vitrakuvet.com.tr

Eczacıbaşı